

Magnetic Brass Multi Track Light



نوران
NOORAN



Magnetic Brass Multi Track Light



Content



Page 8




Page 9



Page 10



Page 11



Page 12




Page 13




Page 14



Page 15



Page 16



Page 17



Page 18



Page 19




Page 20



Page 21

Installation exploded view

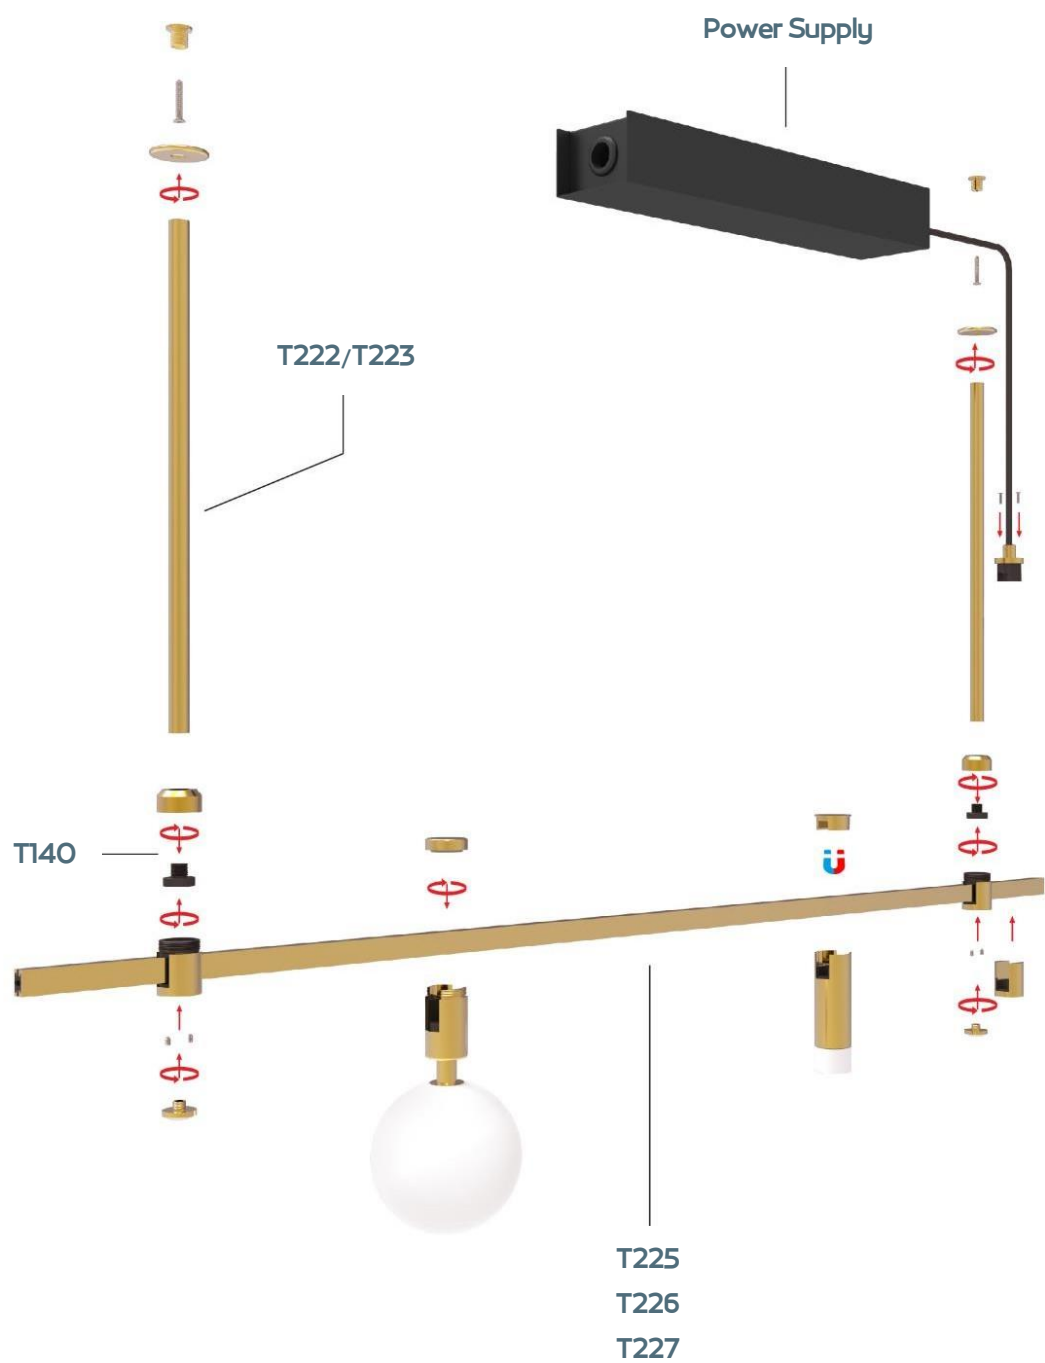

Description of accessories

Profile ►



Track


Length	Code No.
1000mm	T225
2000mm	T226
3000mm	T227




Round Track

Diameter	Code No.
1200mm	T136
1500mm	T137
1800mm	T138


Installation Accessories ►




T139




T140




T141 (With Electricity)




T142



T220 / T221




T222 / T223



T224




Code	T146
Input Voltage	DC42 150MA
Power(Watts)	6W
Lumen	427.9lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux C6
Beam Angle	38°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

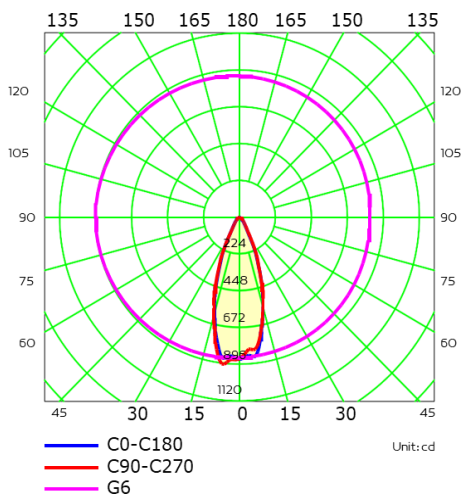

AAI Figure

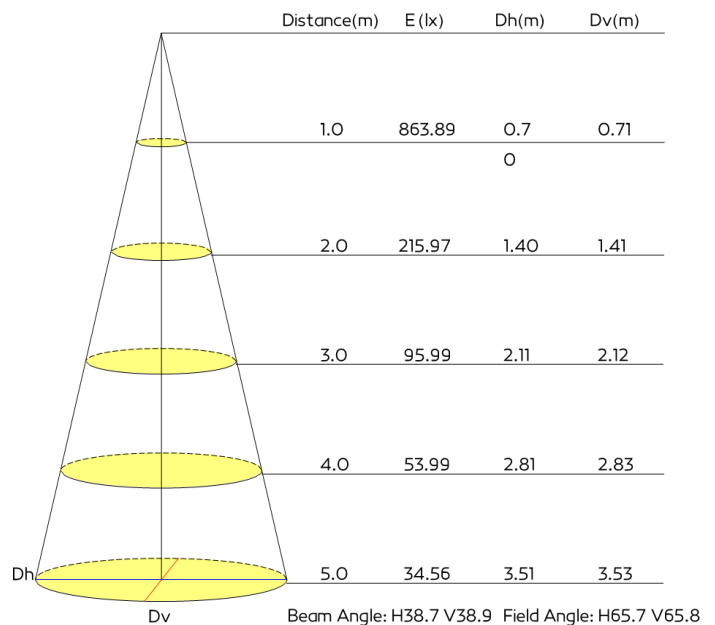


Code	T147
Input Voltage	DC42 100MA
Power(Watts)	4W
Lumen	306.8lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V4 HD
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

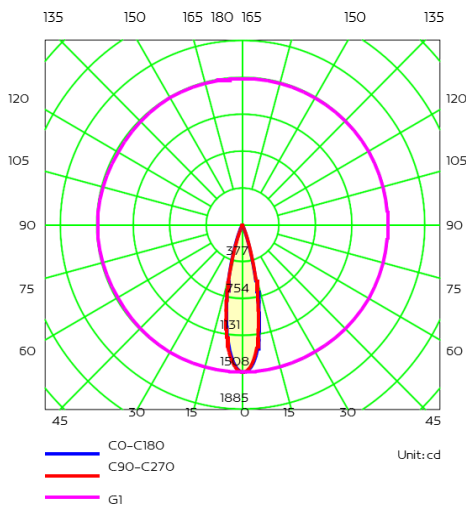

AAI Figure

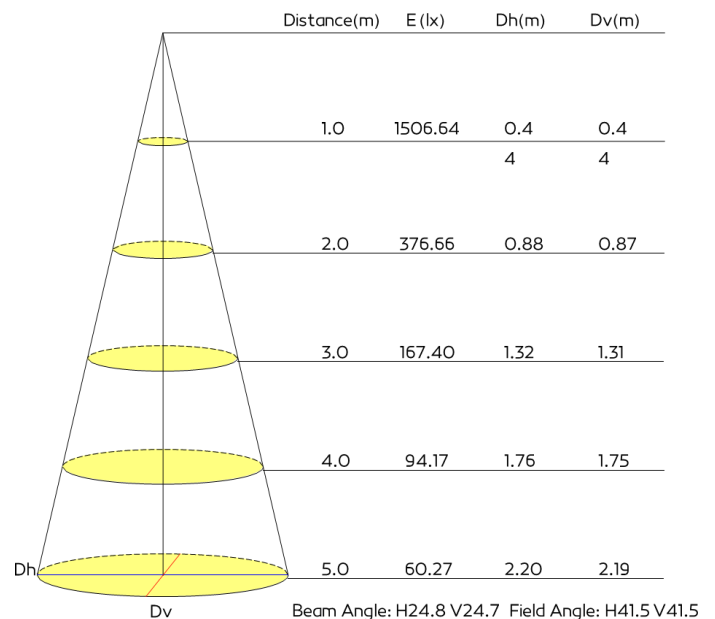


Code	T148
Input Voltage	DC42 215MA
Power(Watts)	9W
Lumen	620.8lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V6 HD
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

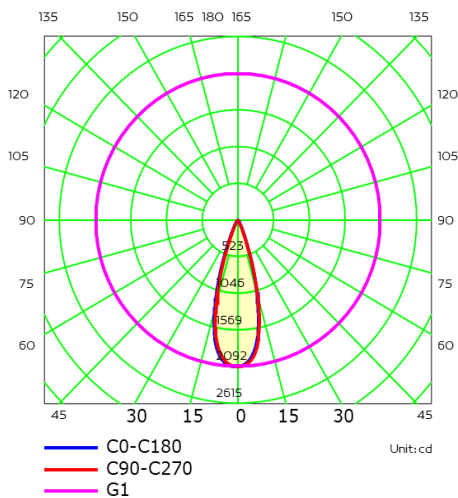

AAI Figure

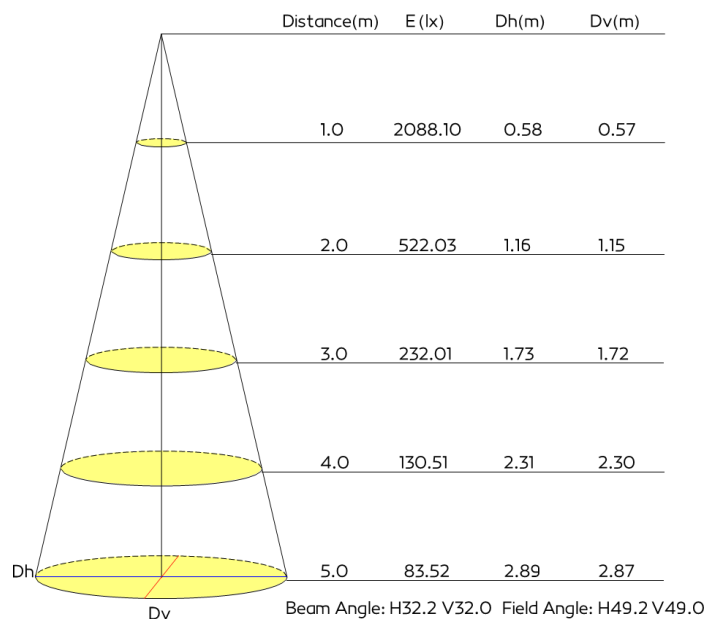


Code	T152
Input Voltage	DC42 100MA
Power(Watts)	4W
Lumen	297.8lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V4 HD
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

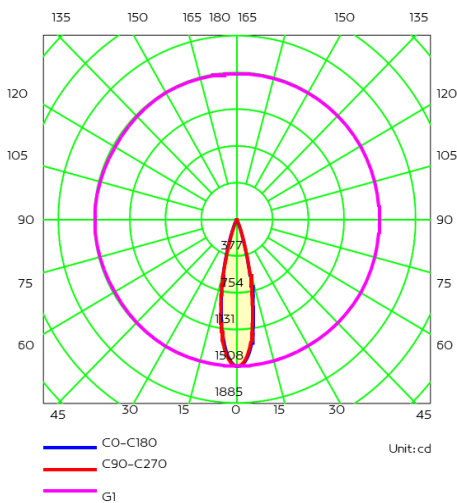

AAI Figure

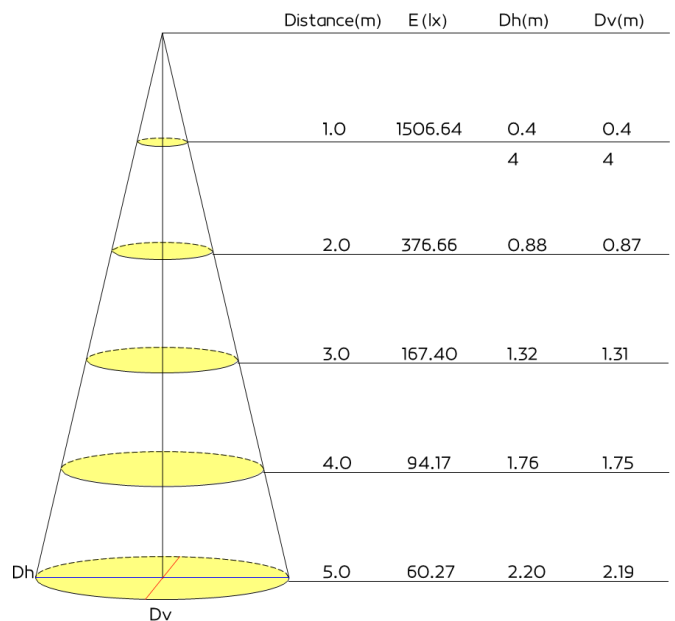


Code	T153
Input Voltage	DC42 215MA
Power(Watts)	9W
Lumen	620.8lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V6 HD
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data

Luminous Intensity Distribution Curve

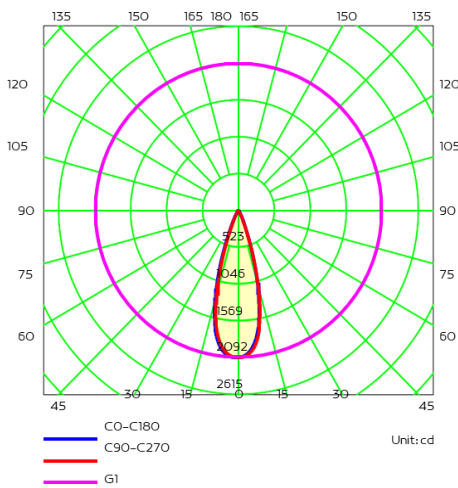

AAI Figure

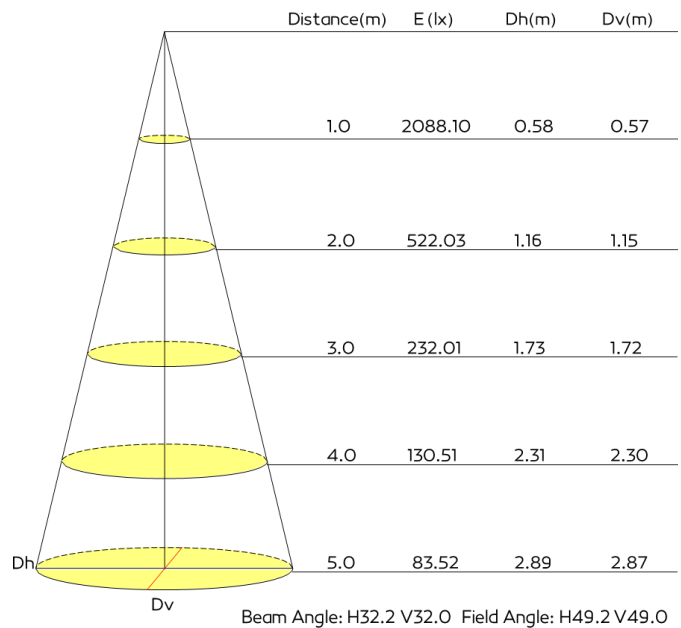


Code	T270
Input Voltage	DC42 100MA
Power(Watts)	4W
Lumen	211.7lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V4 HD
Beam Angle	40°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

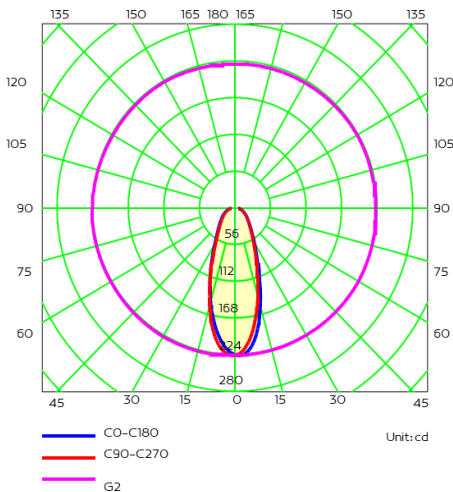

AAI Figure

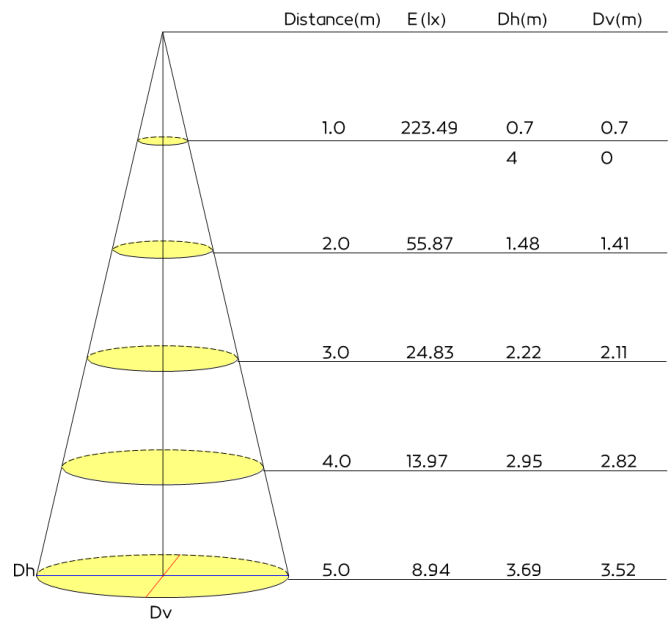


Code	T154
Input Voltage	DC42 215MA
Power(Watts)	9W
Lumen	452lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux V6 HD
Beam Angle	30°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

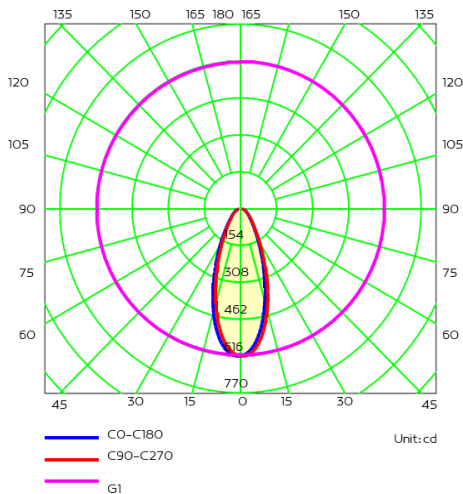

AAI Figure

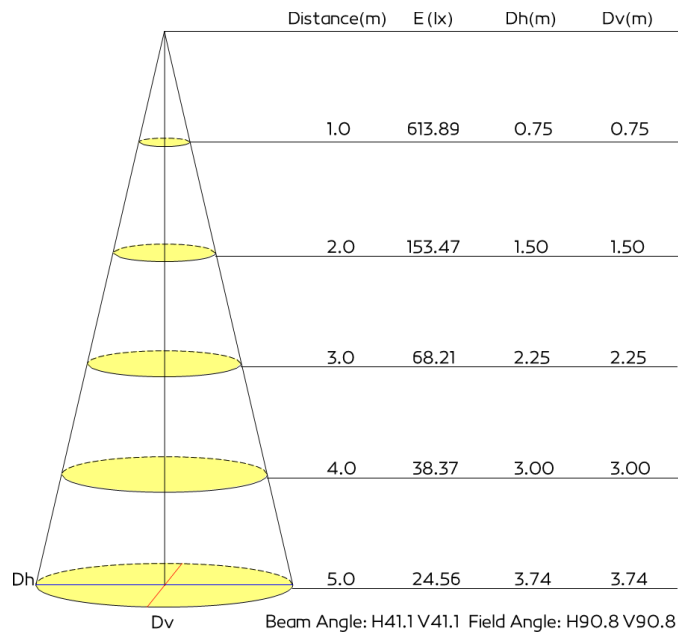


Code	T271
Input Voltage	DC42 96MA
Power(Watts)	4W
Lumen	244lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux C6
Beam Angle	90°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

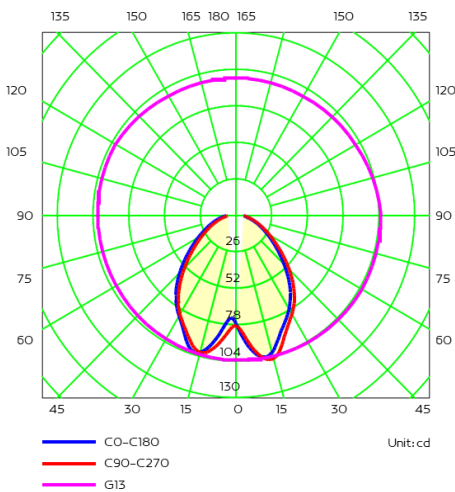

AAI Figure

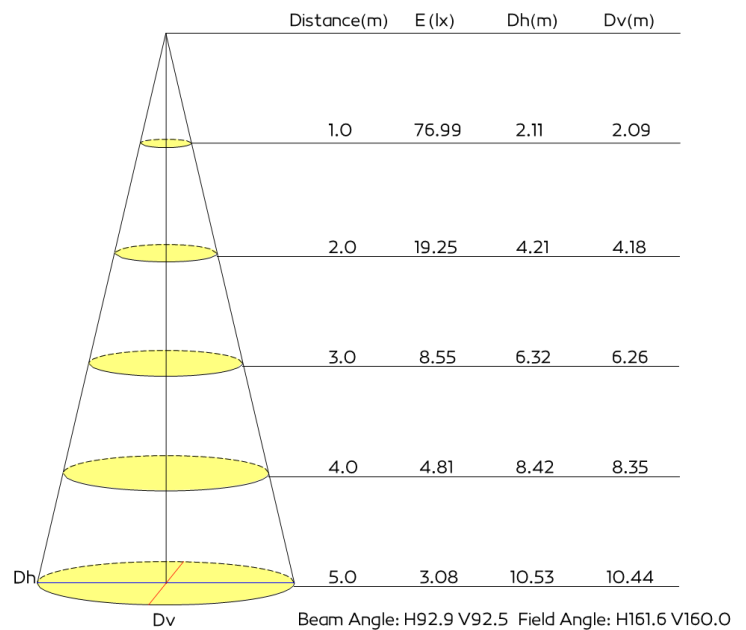


Code	T272
Input Voltage	DC42 96MA
Power(Watts)	2x4W (8W)
Lumen	488lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux C6
Beam Angle	360°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

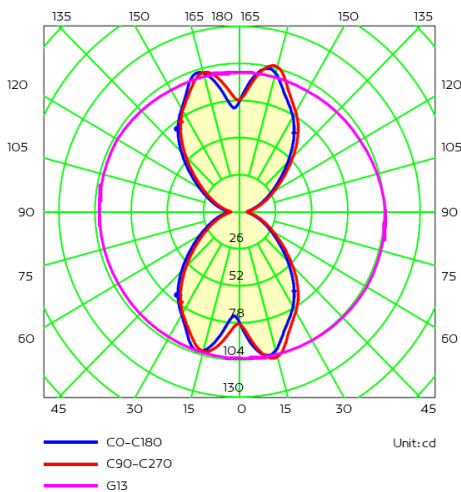

AAI Figure

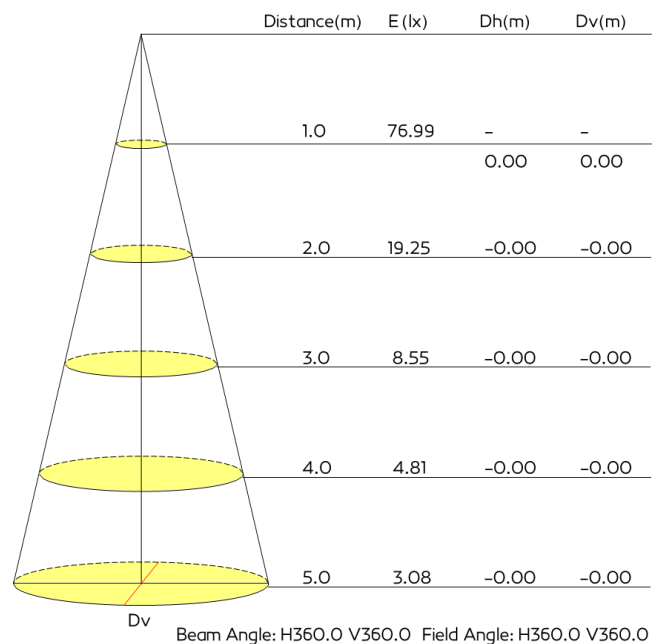


Code	T269
Input Voltage	DC42 96MA
Power(Watts)	3W
Lumen	90lm
Lamp holder	Aluminum PCB
Light Source	CREE 3030
Beam Angle	80°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

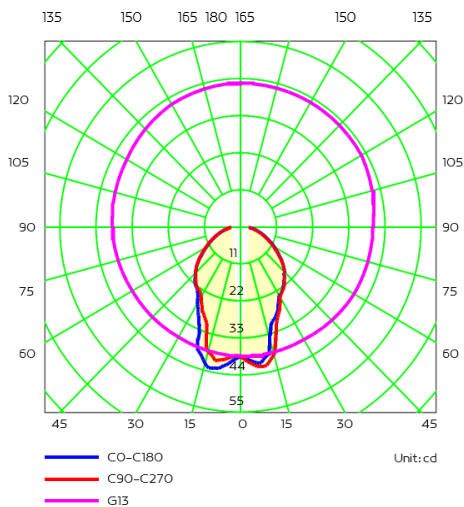

AAI Figure

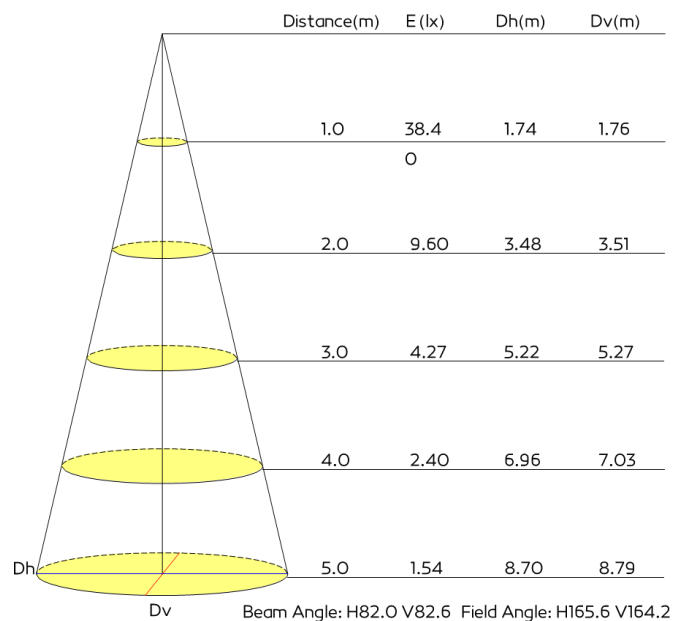


Code	T149
Input Voltage	DC42 96MA
Power(Watts)	3W
Lumen	86.7lm
Lamp holder	Aluminum PCB
Light Source	CREE 3030
Beam Angle	90°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

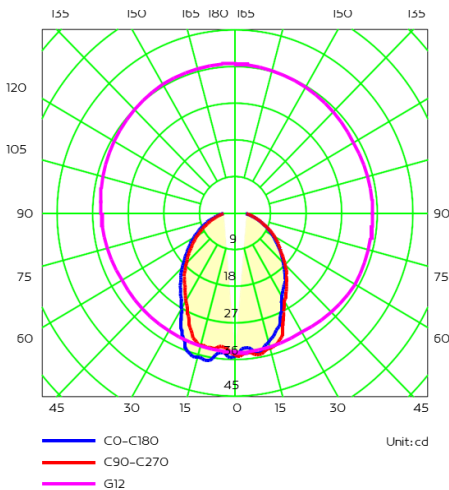

AAI Figure

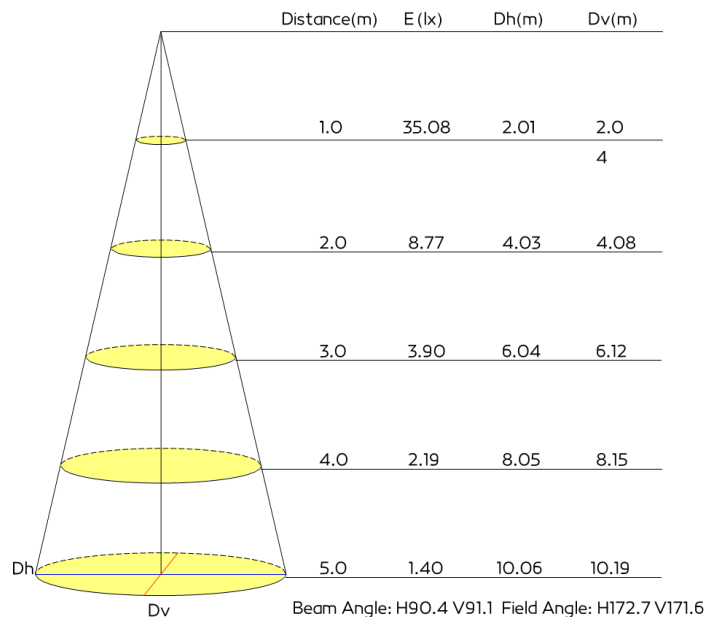


Code	T151
Input Voltage	DC42 96MA
Power(Watts)	4W
Lumen	232.9lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux C6
Beam Angle	20°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data


Luminous Intensity Distribution Curve

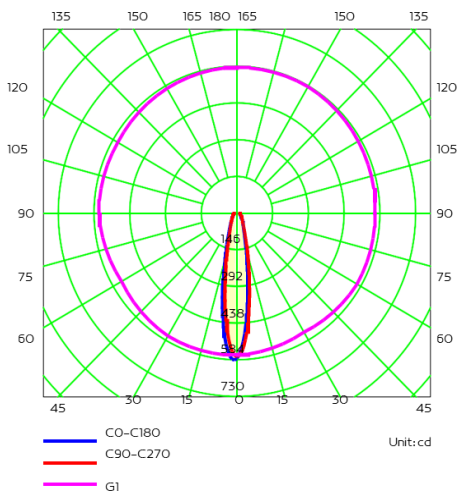

AAI Figure

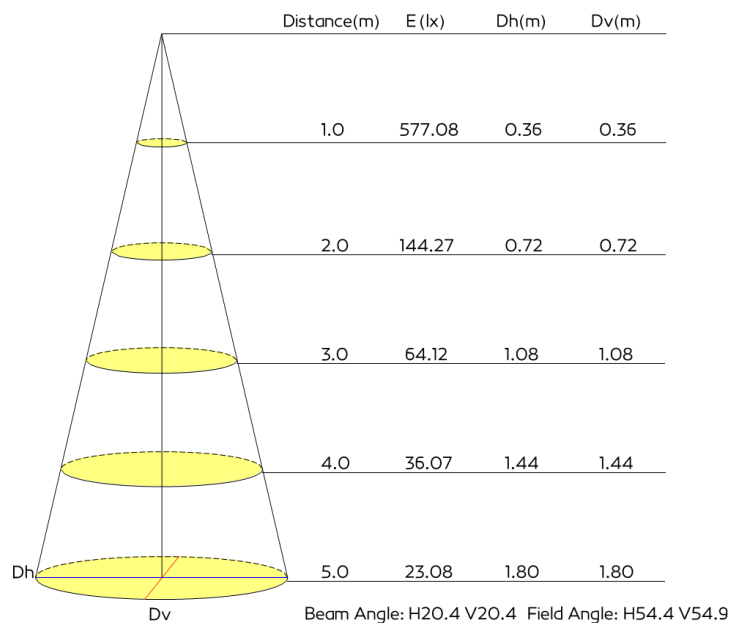


Code	T150
Input Voltage	DC42 110MA
Power(Watts)	4W
Lumen	251.8lm
Lamp holder	Ceramic PCB
Light Source	Bridgelux 2835
Beam Angle	220°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional




Optic Data



Luminous Intensity Distribution Curve

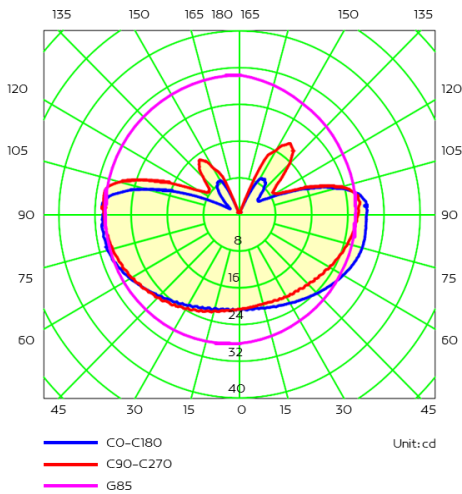

AAI Figure

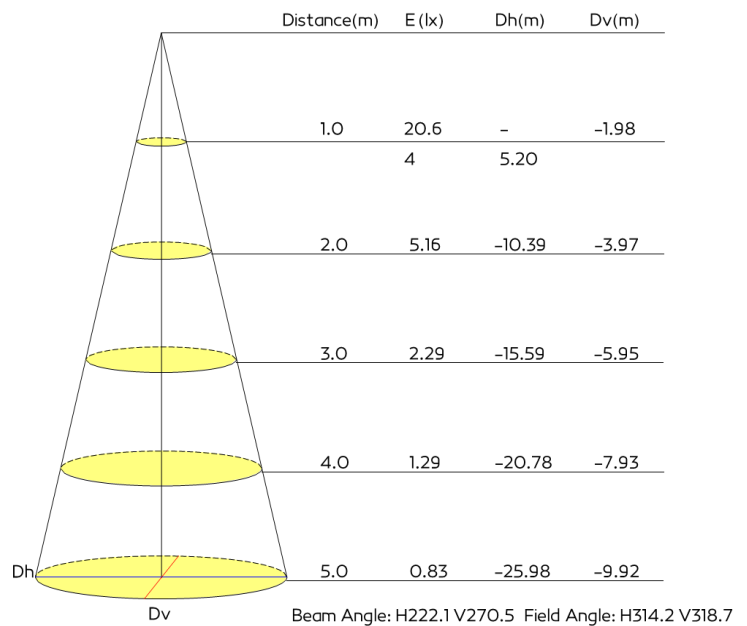


Code	T156
Input Voltage	DC42 230MA
Power(Watts)	9x1W (9W)
Lumen	562.2lm
Lamp holder	Aluminum PCB
Light Source	CREE XPE-2
Beam Angle	24°
Color Temperature	3000K
CRI ≥	80
IP level	IP20
Main Material	Brass
Wire connection way	Track Adaptor
Class	☐ I ☐ II ☒ III
Certificates	CE , ROHS
Dimmable	Optional

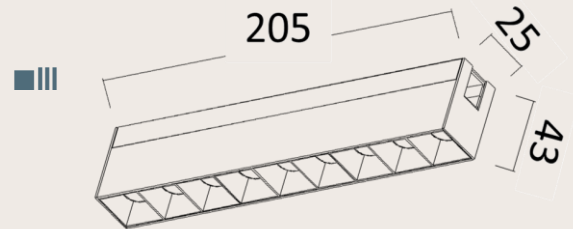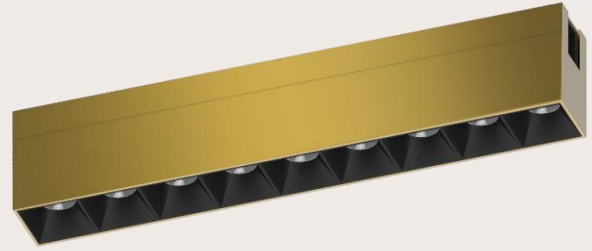


Optic Data


Luminous Intensity Distribution Curve

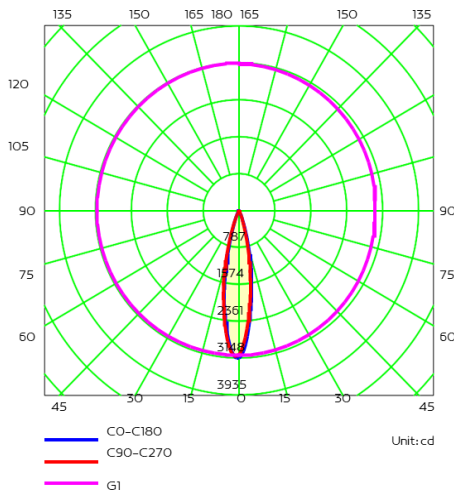

AAI Figure

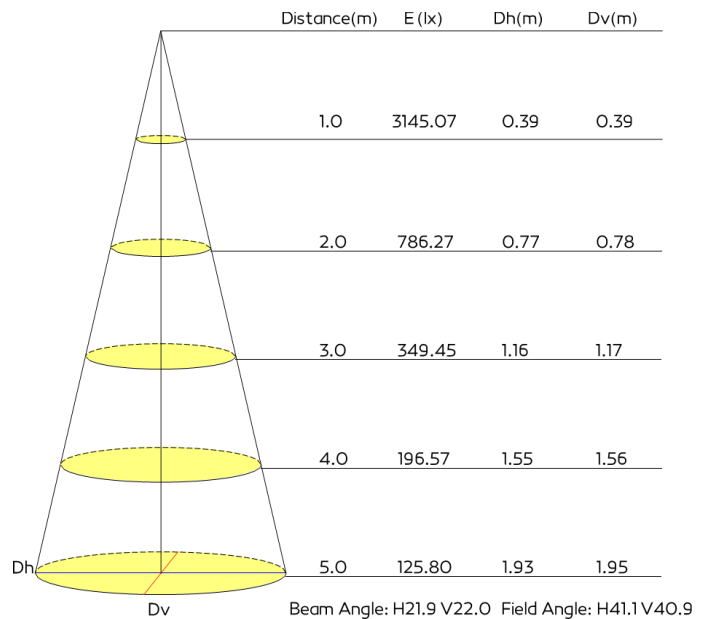

Installation exploded view

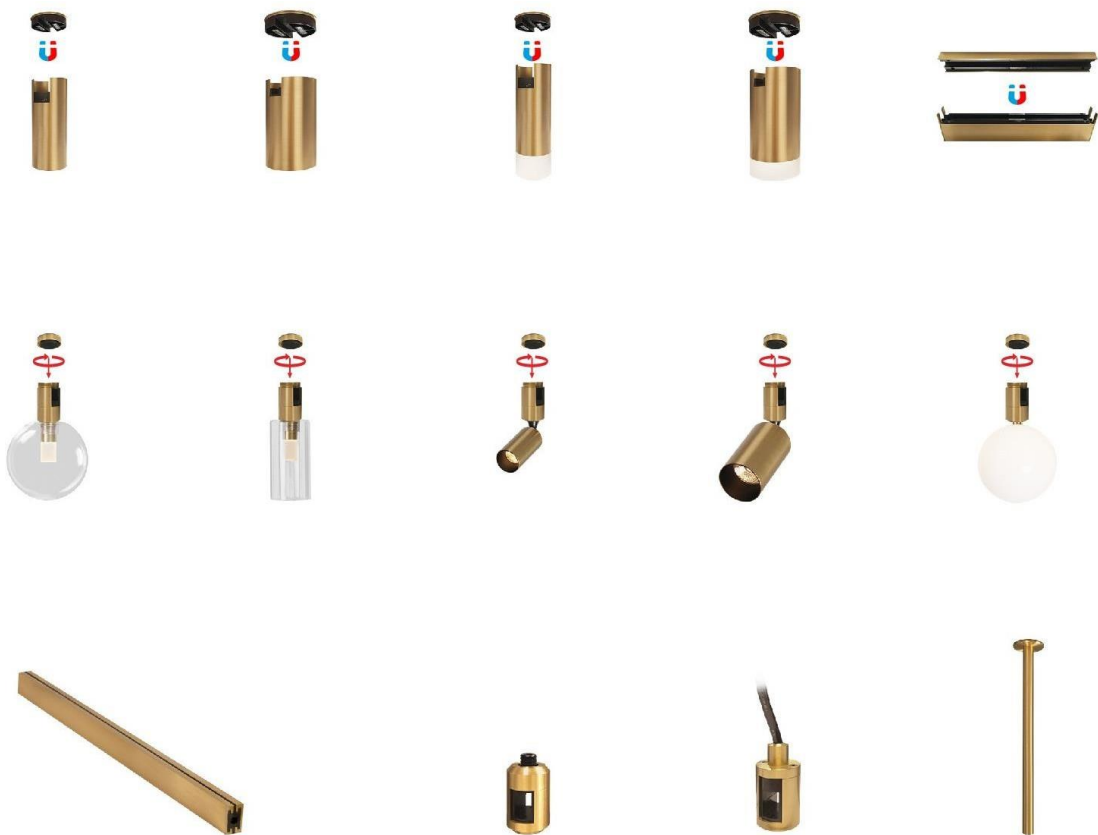

Magnetic Brass Track Light



نوران
NOORAIN

Installation exploded view



Magnetic Brass Track Light



Installation exploded view



Magnetic Brass Track Light





Magnetic Brass Track Light




نوران
NOORAIN



Magnetic Brass Track Light



نوران
NOORAIN

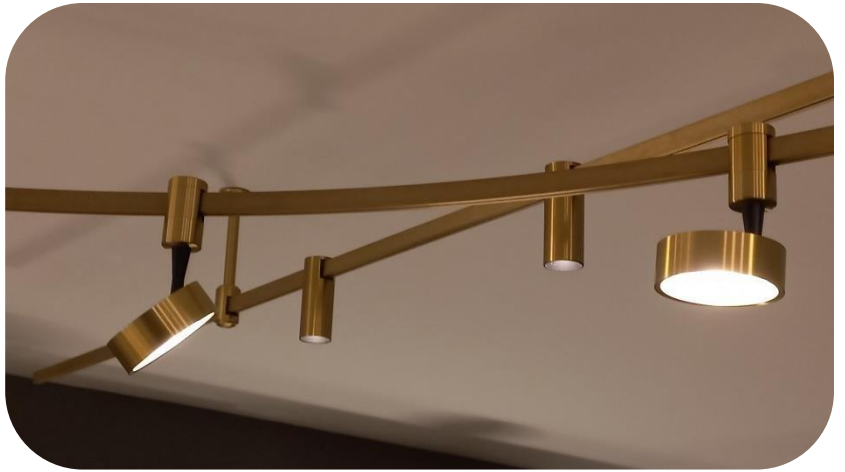

Magnetic Brass Track Light



نوران
NOORAIN

[illegible]

[illegible]



نوران
NOORAN